
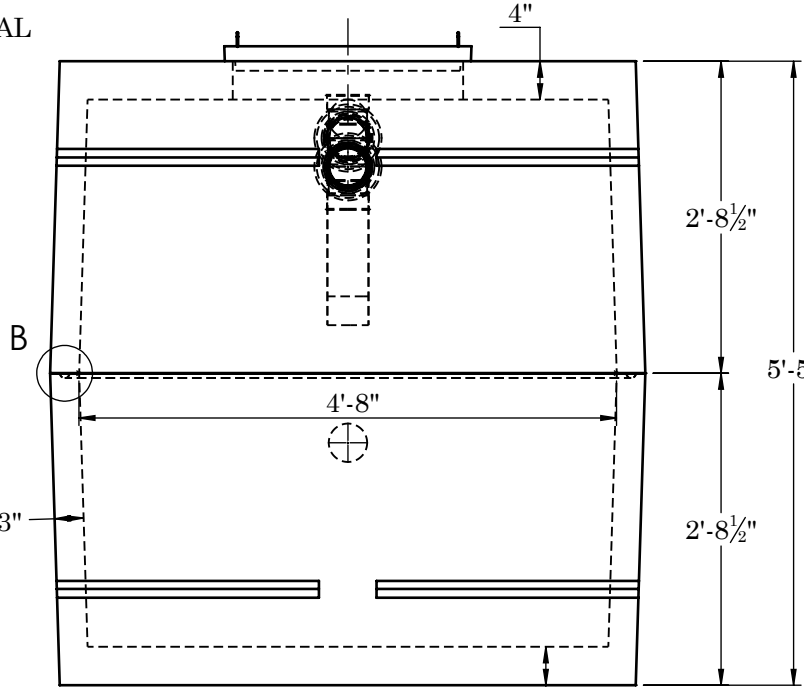
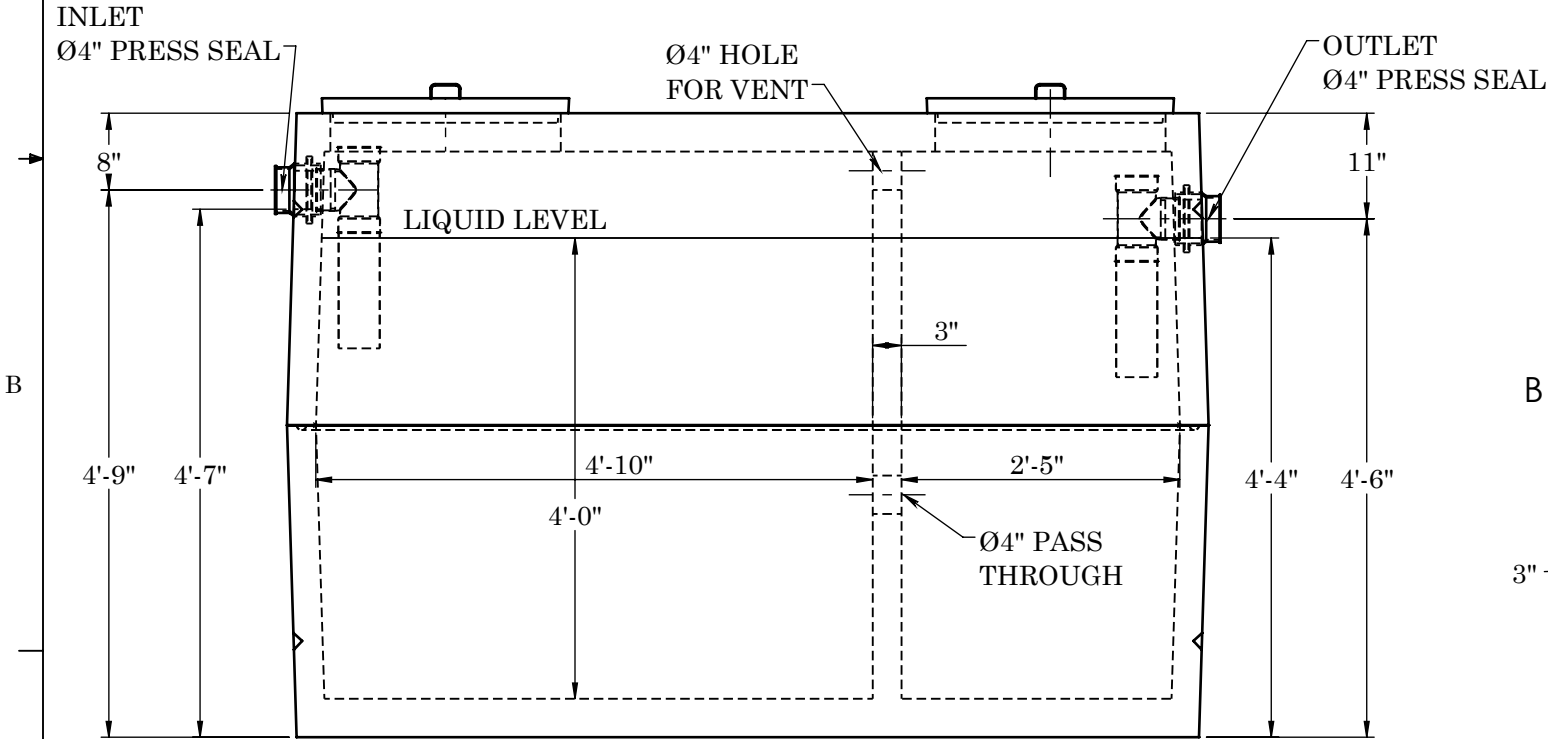


WARRANTY: ALL TANKS MUST BE BACKFILLED AND COMPACTED
PRIOR TO FILLING OR WARRANTY IS VOID

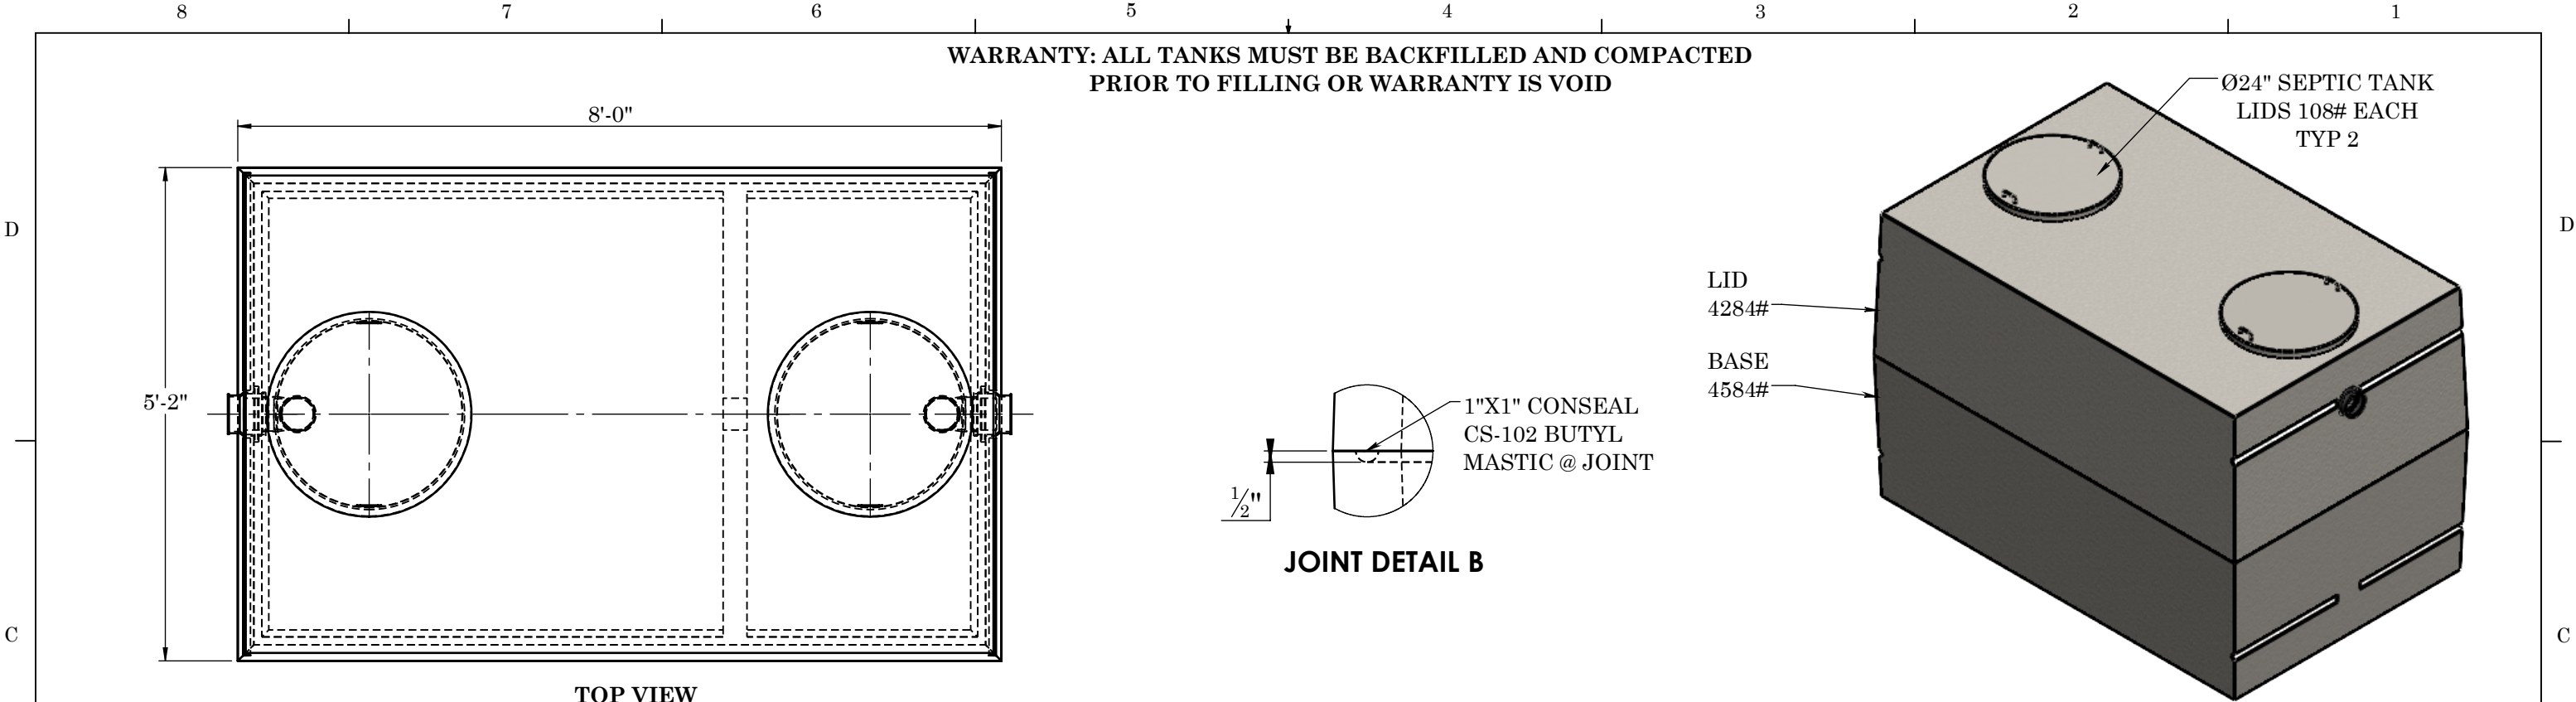

CONCRETE:
TANK CONSTRUCTION UTILIZES 6000 PSI
CONCRETE AND GRADE 60 REBAR

GALLON GALCS:
4'-8"(W) X 7'-6"(L) X 4'-0"(H) X 7.48 = 1047 GALLONS

RISERS:
PVC: Ø24" & FIVER COVER (TO GRADE)
CONCRETE" Ø24" X 8" OR 12" (6" BELOW GRADE)

BEDDING:
4" PEA GRAVEL (NO WATER PRESENT)

EXCAVATION:
12" LARGER THAN TANK DIMENSIONS
EACH WAY, MAX BURY DEPTH 3'-0"