


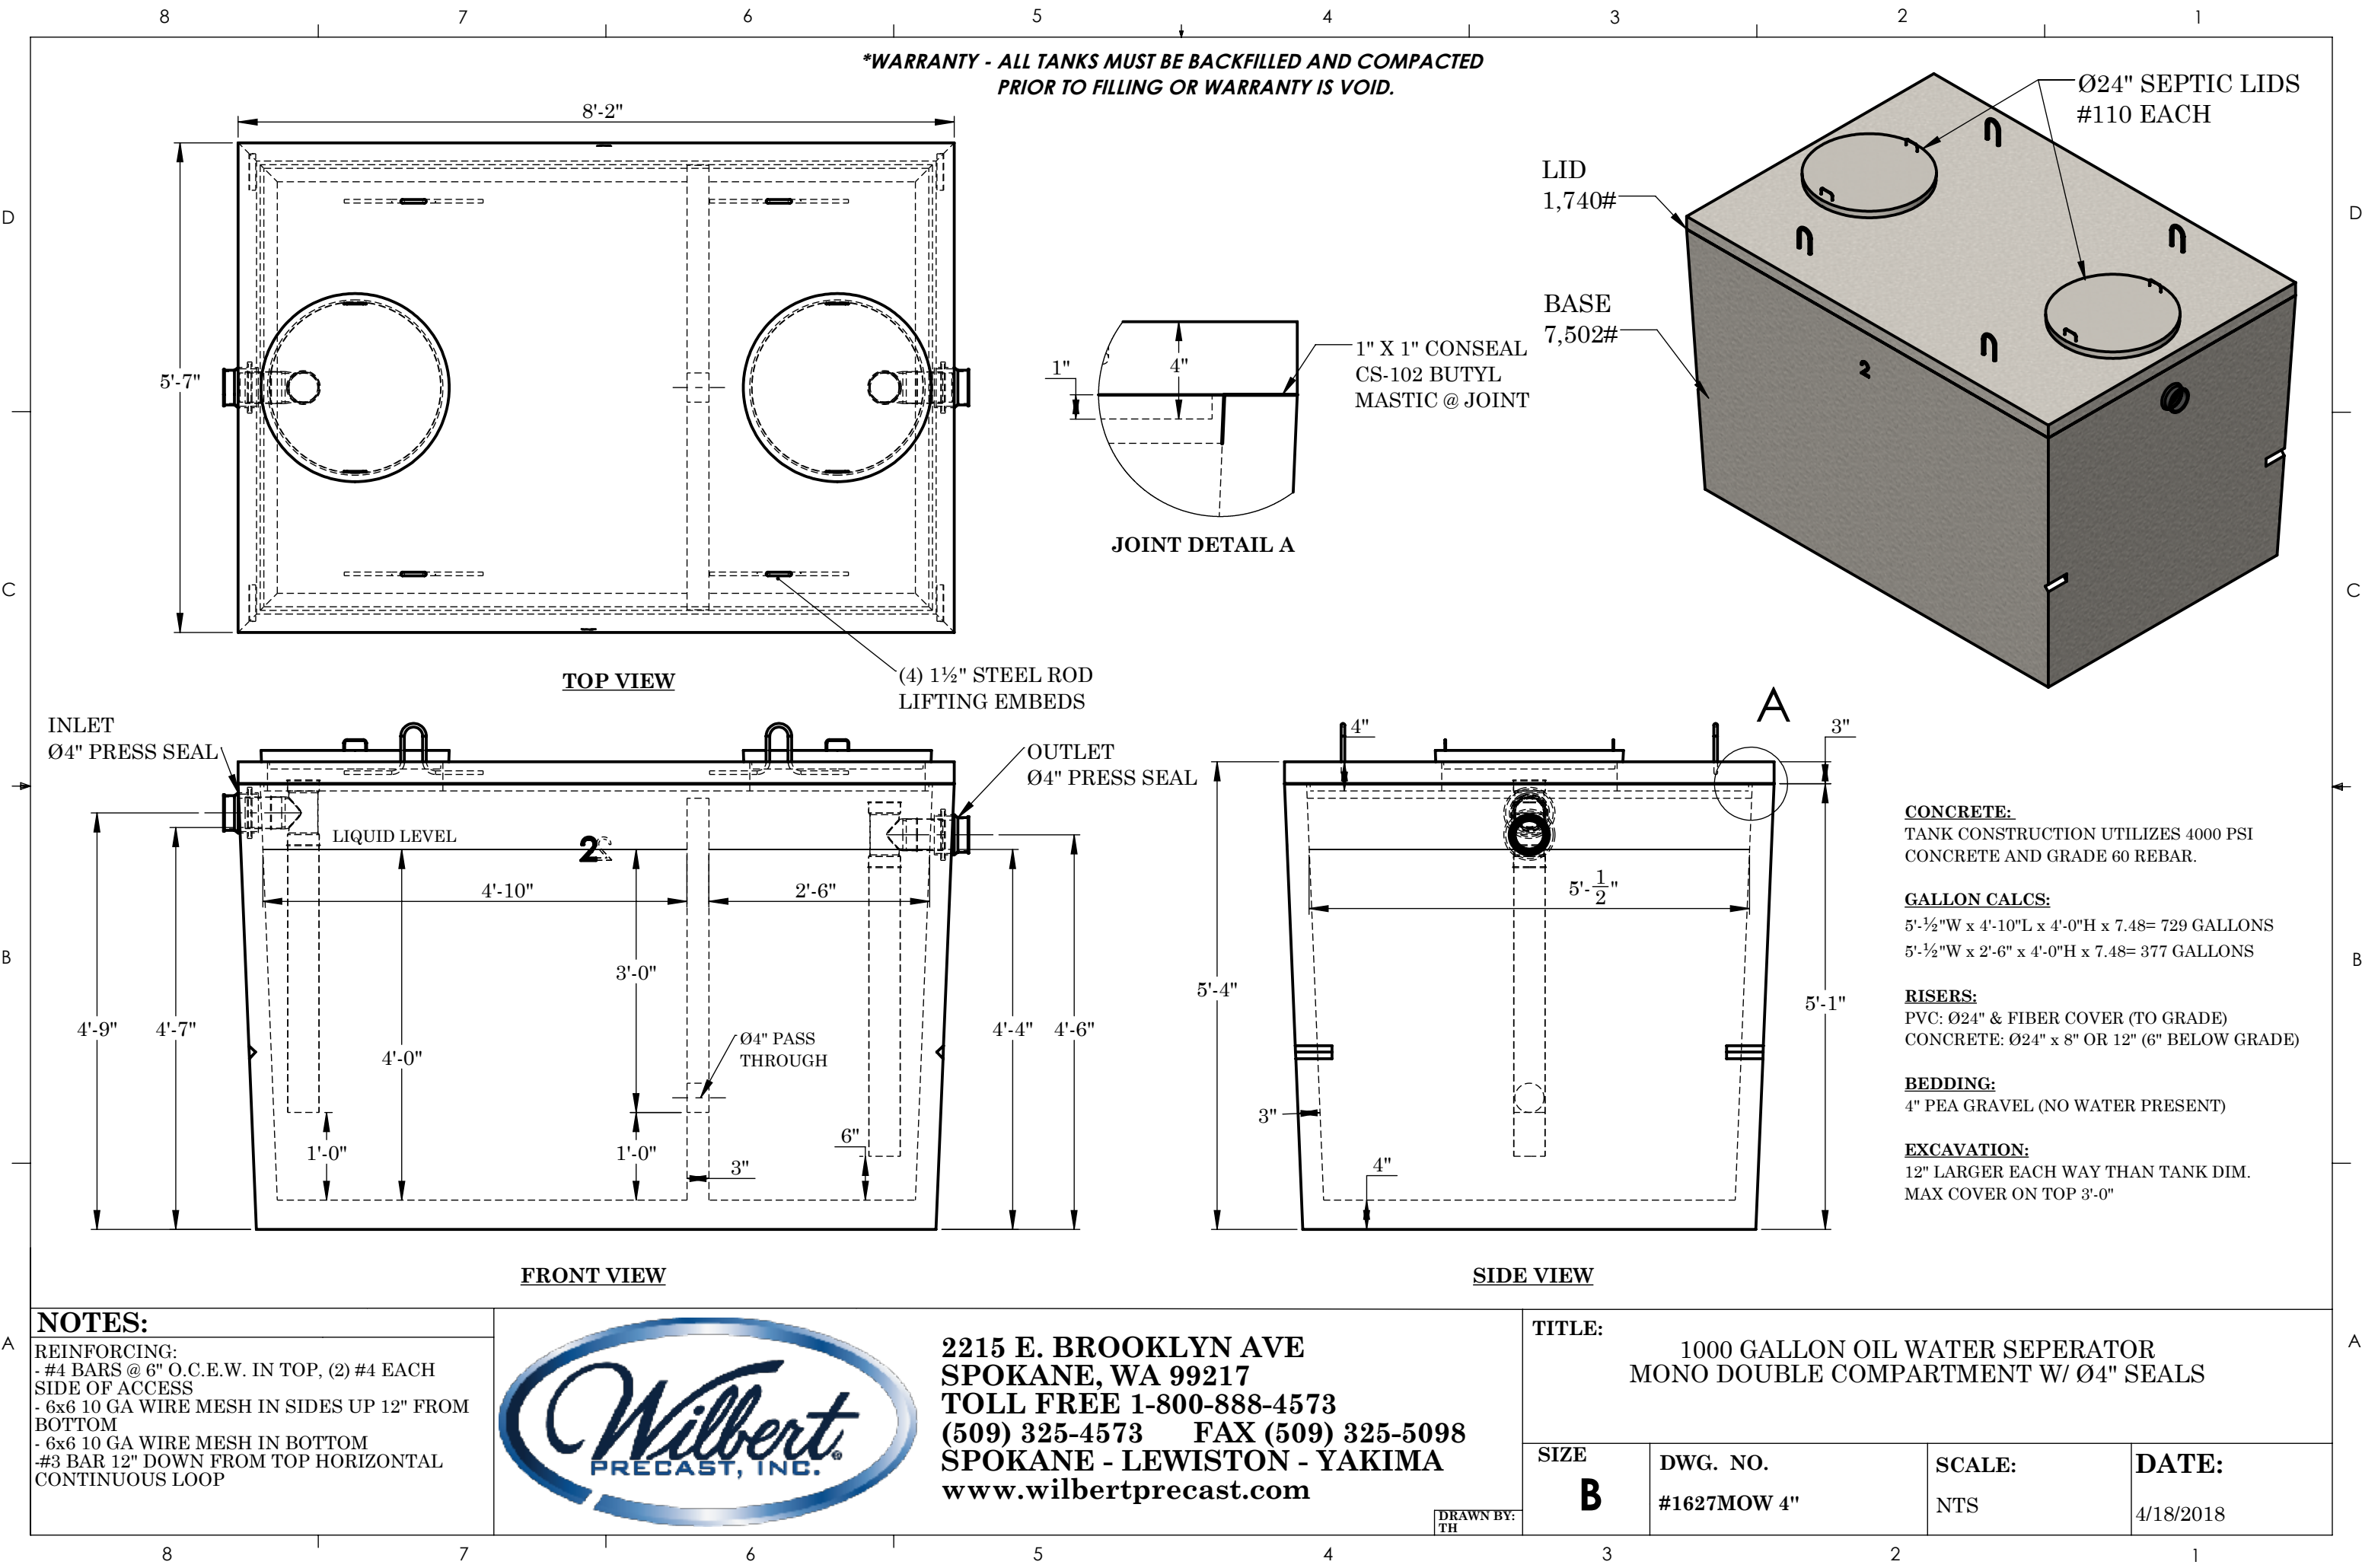

***WARRANTY - ALL TANKS MUST BE BACKFILLED AND COMPACTED PRIOR TO FILLING OR WARRANTY IS VOID.**

TOP VIEW

FRONT VIEW

SIDE VIEW

JOINT DETAIL A

CONCRETE:
TANK CONSTRUCTION UTILIZES 4000 PSI CONCRETE AND GRADE 60 REBAR.

GALLON CALCS:
5'-½"W x 4'-10"L x 4'-0"H x 7.48= 729 GALLONS
5'-½"W x 2'-6" x 4'-0"H x 7.48= 377 GALLONS

RISERS:
PVC: Ø24" & FIBER COVER (TO GRADE)
CONCRETE: Ø24" x 8" OR 12" (6" BELOW GRADE)

BEDDING:
4" PEA GRAVEL (NO WATER PRESENT)

EXCAVATION:
12" LARGER EACH WAY THAN TANK DIM.
MAX COVER ON TOP 3'-0"

NOTES:
REINFORCING:
- #4 BARS @ 6" O.C.E.W. IN TOP, (2) #4 EACH SIDE OF ACCESS
- 6x6 10 GA WIRE MESH IN SIDES UP 12" FROM BOTTOM
- 6x6 10 GA WIRE MESH IN BOTTOM
- #3 BAR 12" DOWN FROM TOP HORIZONTAL CONTINUOUS LOOP



**2215 E. BROOKLYN AVE
SPOKANE, WA 99217
TOLL FREE 1-800-888-4573
(509) 325-4573 FAX (509) 325-5098
SPOKANE - LEWISTON - YAKIMA
www.wilbertprecast.com**

DRAWN BY:
TH

TITLE:
1000 GALLON OIL WATER SEPERATOR
MONO DOUBLE COMPARTMENT W/ Ø4" SEALS

SIZE	DWG. NO.	SCALE:	DATE:
B	#1627MOW 4"	NTS	4/18/2018