
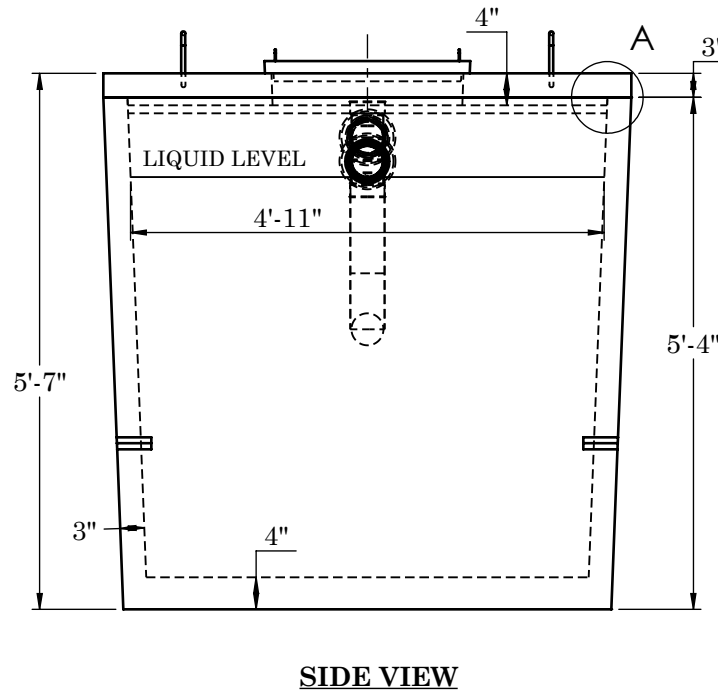
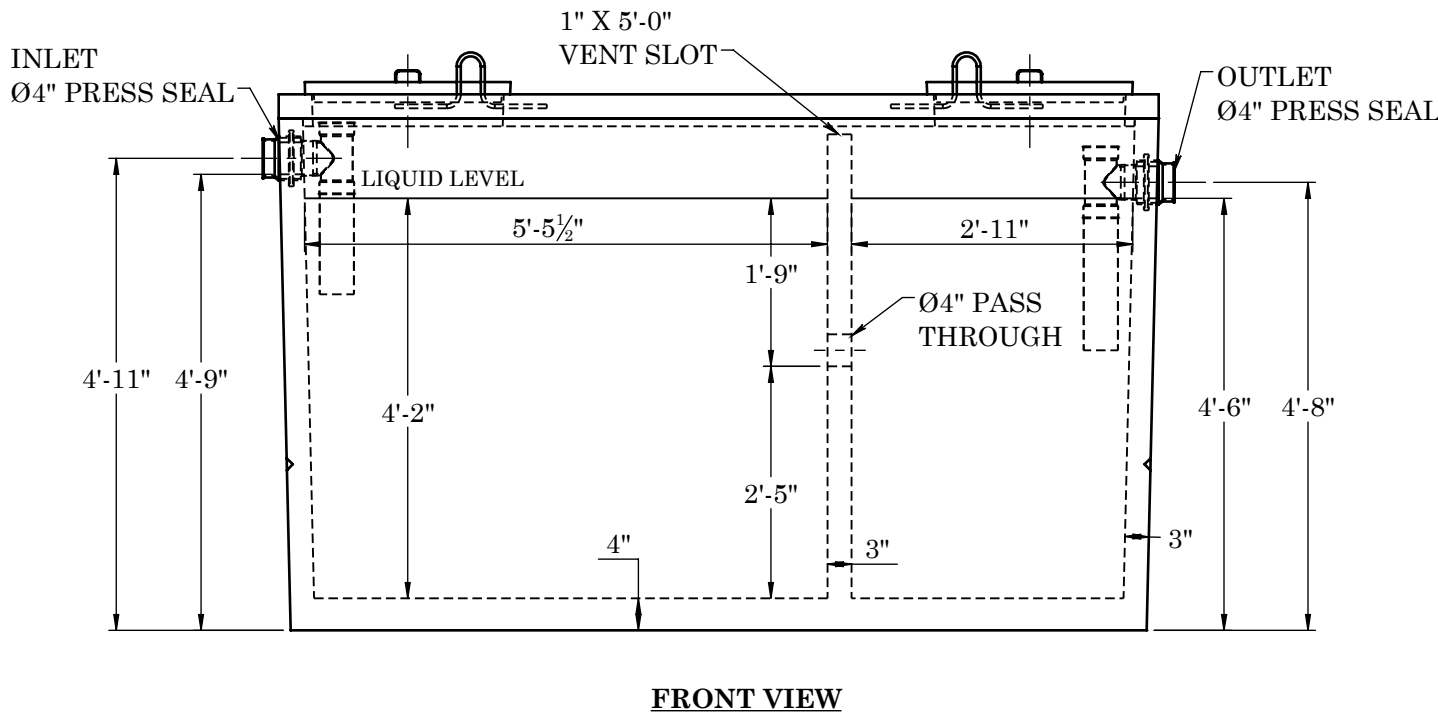
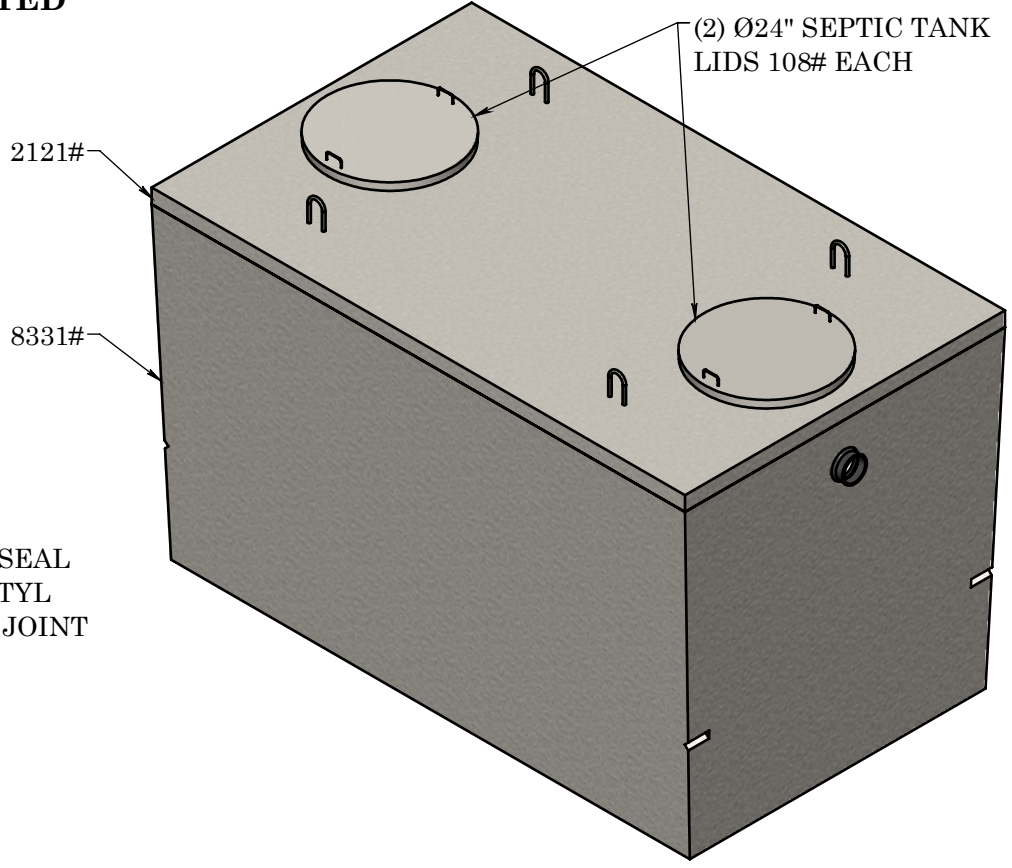
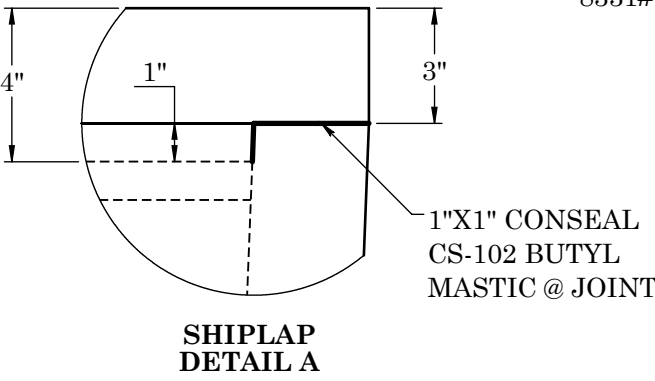


WARRANTY - ALL TANKS MUST BE BACKFILLED AND COMPACTED
PRIOR TO FILLING OR WARRANTY IS VOID

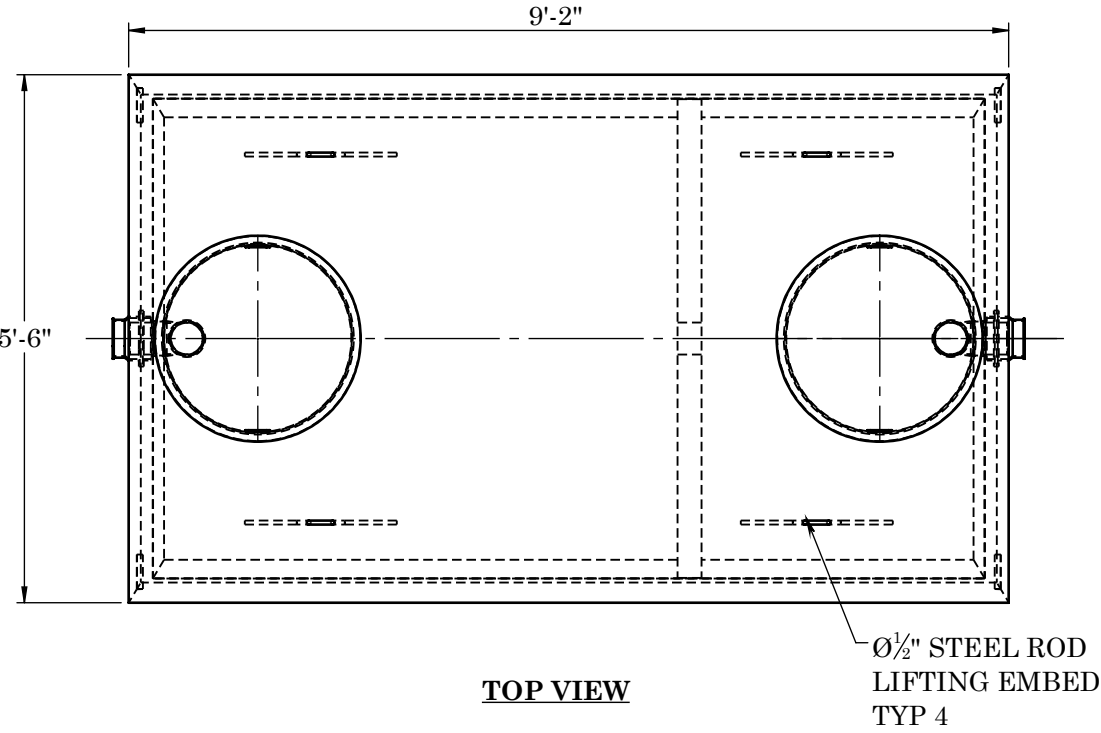

CONCRETE:
TANK CONSTRUCTION UTILIZES 6000 PSI
CONCRETE AND GRADE 60 REBAR

GALLON CALCS:
4'-11"W X 5'-5½"L X 4'-2"H X 7.48 = 836 GALLONS
4'-11"W X 2'-11"L X 4'-2"H X 7.48 = 447 GALLONS

RISERS:
PVC: Ø24" RISER AND FIBER COVER(TO GRADE)
CONCRETE: Ø24" X 8" OR 12" (6" BELOW GRADE)

BEDDING:
4" PEA GRAVEL (NO WATER PRESENT)

EXCAVATION:
12" LARGER THAN TANK DIMENSIONS
EACH WAY. MAX BURY 3'-0"

REINFORCEMENT:			2215 E. BROOKLYN AVE SPOKANE, WA 99217 TOLL FREE 1-800-888-4573 (509) 325-4573 FAX (509) 325-5098 SPOKANE - LEWISTON - YAKIMA www.wilbertprecast.com	TITLE: 1250 GALLON DOUBLE COMPARTMENT MONO SEPTIC TANK	
LID	#4 BAR @ 6" O.C.E.W. (2) #4 BARS X CONT. EACH SIDE OF ACCESS			SIZE B	DWG. NO. #1630M
WALLS & BASE	-6X6 10 GA. WIRE MESH IN WALLS, 12" UP FROM BOTTOM #3 L PERIMETER BARS 12" DOWN FROM TOP OF BASE -6X6 10 GA. WIRE MESH IN BASE			SCALE: NTS	DATE: 12/5/2025