




WARRANTY - ALL TANKS MUST BE BACKFILLED AND COMPACTED
PRIOR TO FILLING OR WARRANTY IS VOID

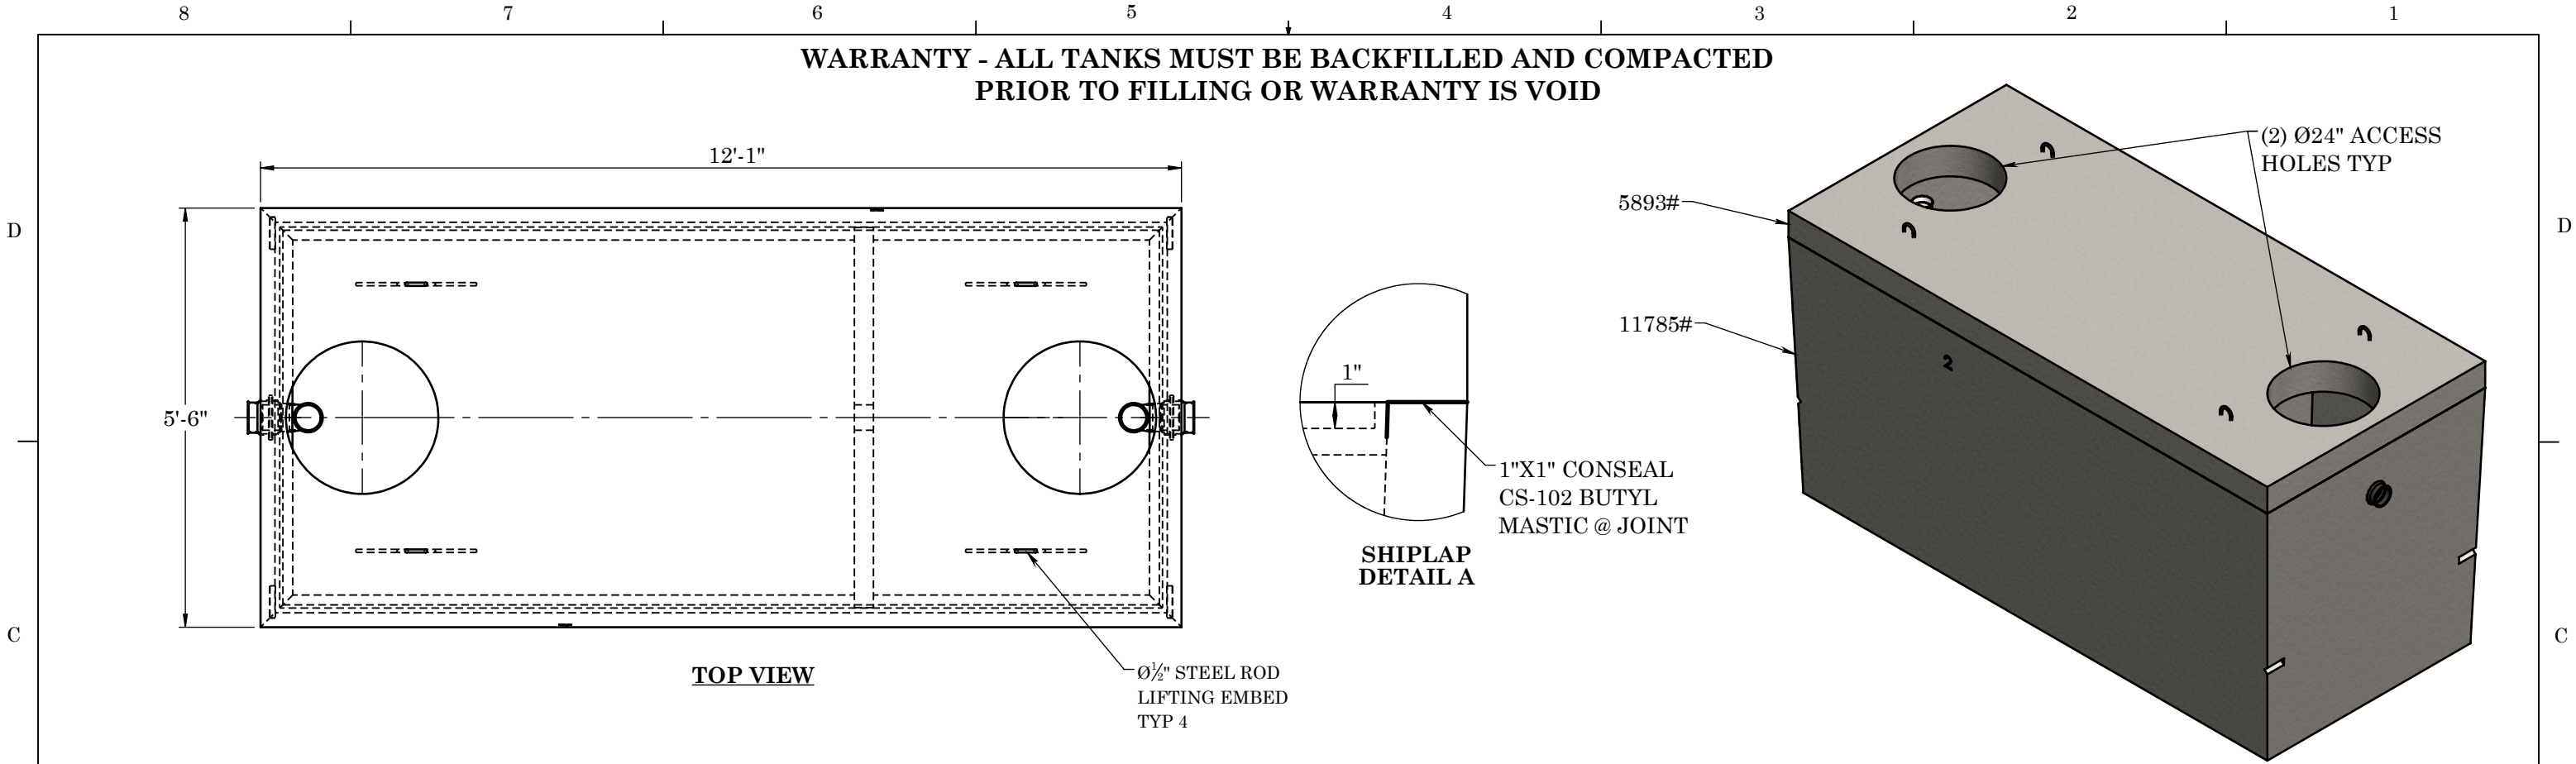

TOP VIEW

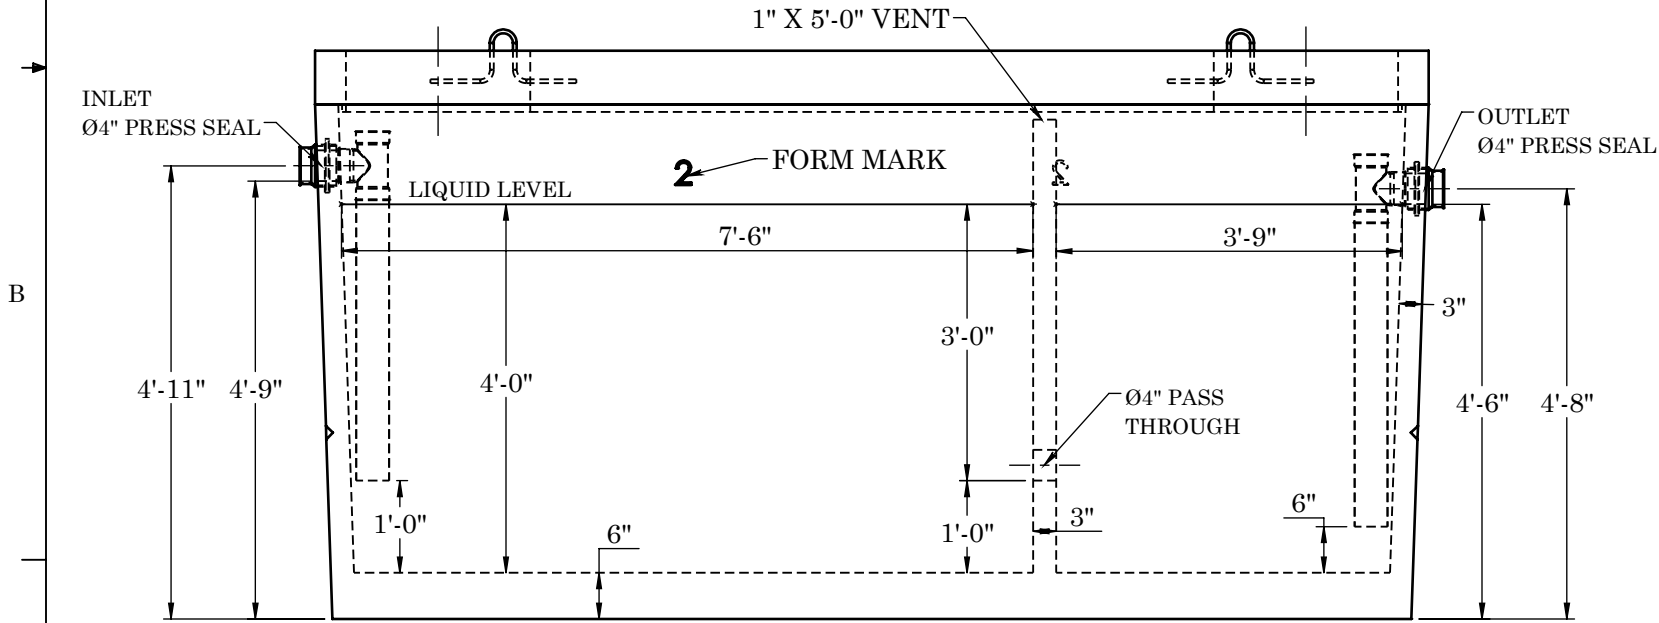

FRONT VIEW

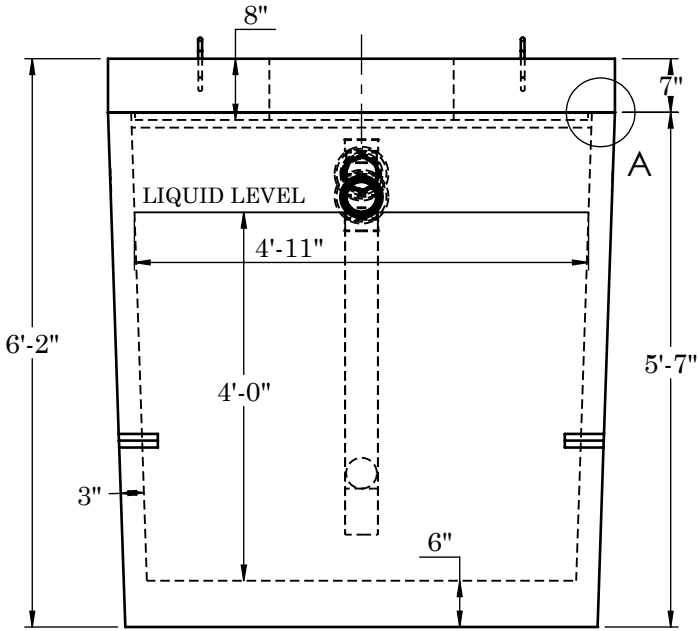

SIDE VIEW

CONCRETE:
TANK CONSTRUCTION UTILIZES 6000 PSI CONCRETE AND GRADE 60 REBAR

GALLON CALCS:
4'-11"W X 7'-6"L X 4'-0"H X 7.48 = 1103 GALLONS
4'-11"W X 3'-9"L X 4'-0"H X 7.48 = 552 GALLONS

RISERS:
PVC: Ø24" RISER AND FIBER COVER(TO GRADE)
CONCRETE: Ø24" X 8" OR 12" (6" BELOW GRADE)

BEDDING:
4" PEA GRAVEL (NO WATER PRESENT)

EXCAVATION:
12" LARGER THAN TANK DIMENSIONS EACH WAY. MAX BURY 3'-0"

REINFORCEMENT:		 2215 E. BROOKLYN AVE SPOKANE, WA 99217 TOLL FREE 1-800-888-4573 (509) 325-4573 FAX (509) 325-5098 SPOKANE - LEWISTON - YAKIMA www.wilbertprecast.com		TITLE: 1500 GALLON OIL WATER SEPARATOR MONO DOUBLE COMPARTMENT HEAVY	
<u>LID</u> -#5 BAR @ 5" O.C.E.W. -(2) #4 BARS X CONT. EACH SIDE OF ACCESS	<u>BASE & WALLS</u> -6X6 10 GA. WIRE MESH IN WALLS 12" UP FROM BOTTOM -#4 BAR @ 8" O.C.E.W. -6X6 10 GA. WIRE MESH IN BASE -#3 L PERIMETER BARS 12" DOWN FROM TOP OF BASE			SIZE B	DWG. NO. #1634MOWTB
				SCALE: NTS	DATE: 12/18/2025