




WARRANTY: ALL TANKS MUST BE BACKFILLED AND COMPACTED
PRIOR TO FILLING OR WARRANTY IS VOID

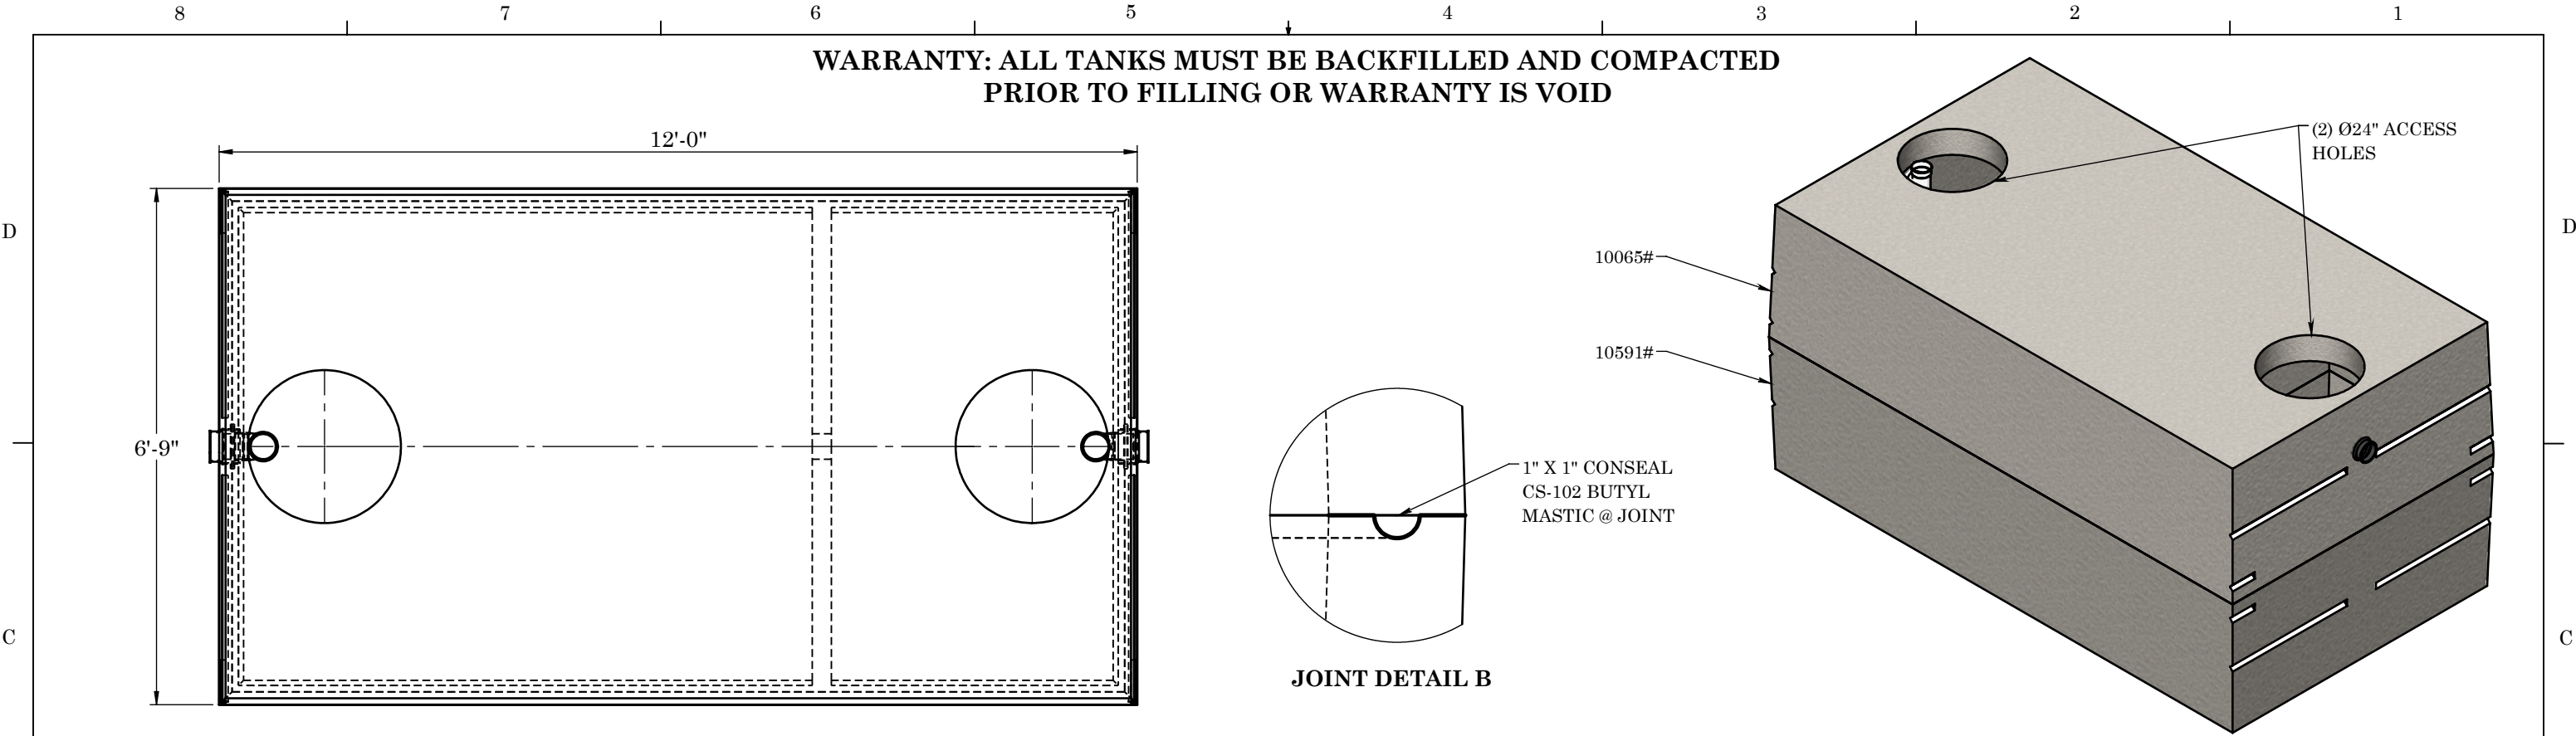

TOP VIEW

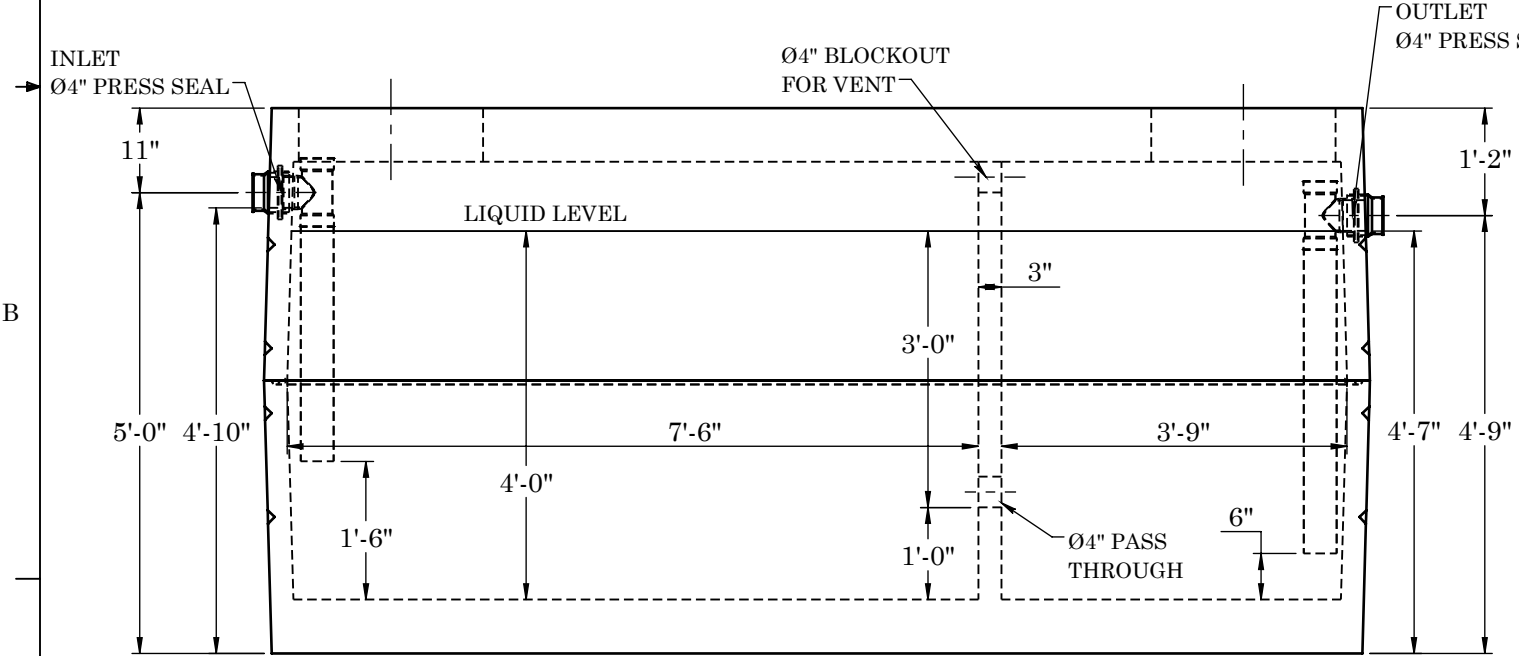

FRONT VIEW

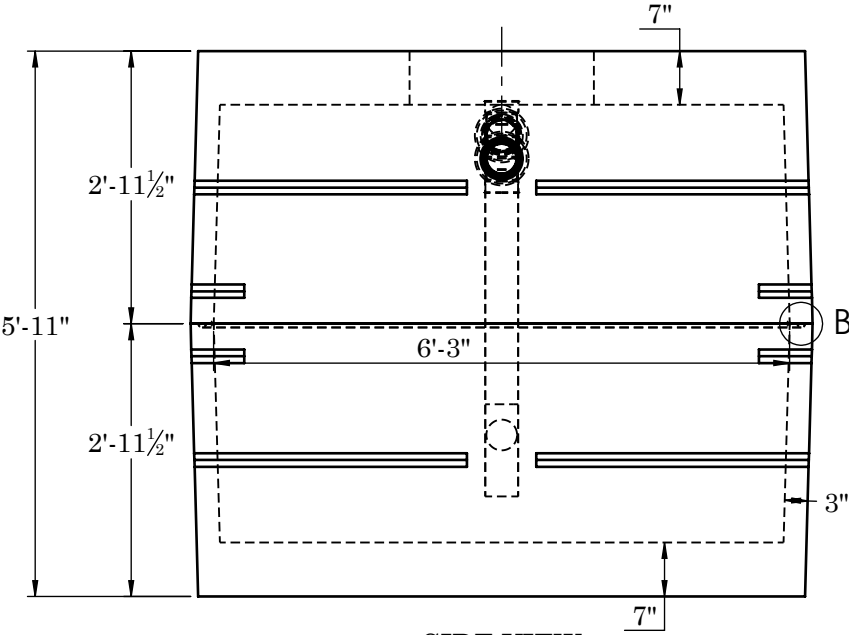

SIDE VIEW

CONCRETE:
TANK CONSTRUCTION UTILIZES 6000 PSI
CONCRETE AND GRADE 60 REBAR

GALLON CALCS:
6'-3"W X 7'-6"L X 4'-0" H X 7.48 = 1402 GALLONS
6'-3"W X 3'-9"L X 4'-0"H X 7.48 = 701 GALLONS

RISERS:
PVC: Ø24" AND FIBER COVER (TO GRADE)
CONCRETE: Ø24" X 8" OR 12" (6" BELOW GRADE)

BEDDING:
4" PEA GRAVEL (NO WATER PRESENT)

EXCAVATION:
12" LARGER THAN TANK DIMENSIONS
EACH WAY, MAX BURY DEPTH 5'-0"

REINFORCEMENT:			2215 E. BROOKLYN AVE SPOKANE, WA 99217 TOLL FREE 1-800-888-4573 (509) 325-4573 FAX (509) 325-5098 SPOKANE - LEWISTON - YAKIMA www.wilbertprecast.com	TITLE: 2000 GALLON DOUBLE COMPARTMENT 2-PIECE OIL/WATER SEPERATOR HEAVY			
-TOP	#4 U-BARS @ 5" O.C.E.W. (2) #4 BARS EACH SIDE OF ACCESS			SIZE	DWG. NO.	SCALE:	DATE:
-SIDES	#4 BAR @ 5" O.C.E.W.			B	#1638OWTB 4"	NTS	12/17/2025
-BASE	#4 U-BARS @ 5" O.C.E.W.						